




**A**




**90° A**

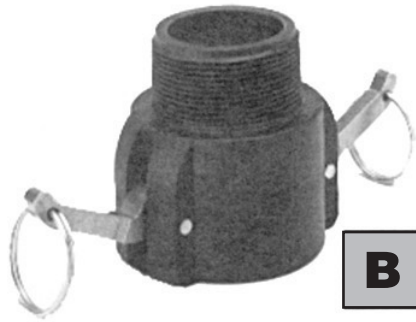

**B**



**C**

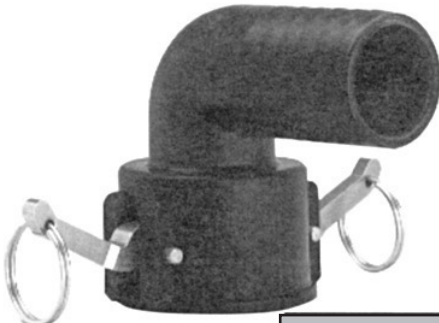

**90° C**



**D**



**90° D**




**E**



**F**



**90° F**

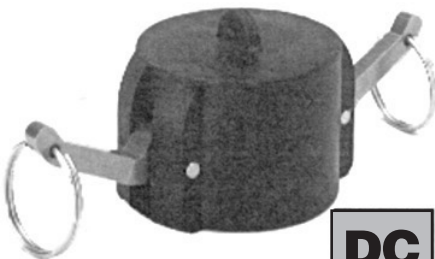

**DC**



**DP**

**Cam Action Couplers & Adapters** Polypropylene

With 304 Stainless Steel Handlers

PART #	DESCRIPTION	BOX QUANTITY	RETAIL
61199	1/2" A	24	2.59
61255	1/2" B	24	6.91
61256	1/2" C	24	6.91
61257	1/2" D	24	6.91
61203	1/2" E	24	2.86
61204	1/2" F	24	2.86
61258	1/2" DC	24	6.67
61214	1/2" DP	24	2.59
61207	3/4" A	24	2.59
61259	3/4" B	24	6.91
61260	3/4" C	24	6.91
61261	3/4" D	24	6.91
61211	3/4" E	24	2.86
61212	3/4" F	24	2.86
61258	3/4" DC	24	6.67
61214	3/4" DP	24	2.59
61215	1" A	24	2.83
61263	1" B	24	7.88
61264	1" C	24	7.88
61265	1" D	24	7.88
61219	1" E	24	3.24
61220	1" F	24	3.24
61266	1" DC	24	7.65
61222	1" DP	24	2.83
61223	1-1/4" A	24	2.94
61267	1-1/4" B	24	9.43
61268	1-1/4" C	24	9.43
61269	1-1/4" D	24	9.43
61227	1-1/4" E	24	3.27
61228	1-1/4" F	24	3.27
61274	1-1/4" DC	24	9.34
61238	1-1/4" DP	24	3.13
61231	1-1/2" A	24	3.16
61293	1-1/2" 90° A	24	5.22

PART #	DESCRIPTION	BOX QUANTITY	RETAIL
61271	1-1/2" B	24	9.34
61272	1-1/2" C	24	9.34
61299	1-1/2" 90° C	24	10.91
61273	1-1/2" D	24	9.34
61300	1-1/2" 90° D	24	10.91
61235	1-1/2" E	24	3.30
61236	1-1/2" F	24	3.30
61289	1-1/2" 90° F	24	6.04
61274	1-1/2" DC	24	9.34
61238	1-1/2" DP	24	3.13
61239	2" A	24	3.74
61296	2" 90° A	24	5.57
61275	2" B	24	11.04
61276	2" C	24	11.04
61301	2" 90° C	24	13.22
61277	2" D	24	11.04
61302	2" 90° D	24	13.22
61243	2" E	24	4.34
61244	2" F	24	4.34
61291	2" 90° F	24	6.30
61278	2" DC	24	11.04
61246	2" DP	24	4.22
61247	3" A	24	8.38
61279	3" B	24	18.19
61280	3" C	24	18.19
61281	3" D	24	18.19
61251	3" E	24	10.70
61252	3" F	24	10.70
61282	3" DC	24	18.19
61254	3" DP	24	8.38
62789	4" A	8	13.78
62790	4" B	8	36.50
62791	4" C	8	36.50
62792	4" D	8	36.50
62793	4" E	8	13.78
62794	4" F	8	13.78
62795	4" DC	8	26.56
62796	4" DP	8	10.96

**NOTE:** 1/2" couplers and adapters will interchange with 3/4" couplers and adapters. Only the threads and barbs are 1/2".

1-1/4" couplers and adapters will interchange with 1-1/2" couplers and adapters. Only the threads and barbs are 1-1/4".