


Y-Line Strainers




A

- Manufactured from glass re-inforced polypropylene.
- Protects and prevents clogging of pipelines, pumps and spray tips.
- Easy access for cleaning.
- Sizes from 1/2" to 3".
- Pressure rated at 90 PSI @ 70°F, 3" - 70 PSI @ 70°F.
- 6 to 80 mesh 304 stainless steel screens. Screen for 3" is polypropylene reinforced.
- Standard with EPDM gaskets.
- 3" strainer features a 1/2" drain plug in bottom of cap.

Recommended Operating Pressure:

1/2" thru 2" - 70 PSI @ 0°F • 90 PSI @ 70°F • 50 PSI @ 150°F


3" - 55 PSI @ 0°F • 70 PSI @ 70°F • 40 PSI @ 150°F



B

Item Code	Description	Part Number	Standard Packaging
A	3/4" with 40 Mesh Screen	61476	15.89
A	3/4" with 80 Mesh Screen	61477	15.89
A	1" with 40 Mesh Screen	61479	19.38
A	1" with 80 Mesh Screen	61480	19.38
A	1 1/2" with 40-20 Mesh Screen	61489	37.96
A	1 1/2" with 80-20 Mesh Screen	61490	37.96
A	2" with 40-20 Mesh Screen	61494	37.96
A	2" with 80-20 Mesh Screen	61495	37.96
B	3" with 20 Mesh Screen	62339	221.94
B	3" with 40 Mesh Screen	62340	221.94

Polypropylene "T" Line Strainers

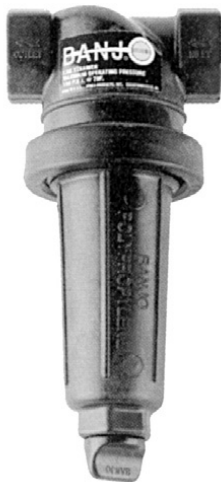

3/4" And 1"



FEATURES

- Heavy-duty glass reinforced polypropylene.
- Clean-out plug.
- 304 stainless steel reinforced screens.
- EPDM gaskets standard.
FKM (viton type) available.
- 150 P.S.I. at 70°F



1 1/4" And 1 1/2"

3/4" AND 1" POLY "T" STRAINERS

PART NO.	SIZE	DESCRIPTION	QTY	PRICE EA.
LST075-80	3/4" x 3/4"	Strainer - 80 Mesh S.S. Screen	1	24.76
LST075-100	3/4" x 3/4"	Strainer - 100 Mesh S.S. Screen	1	24.76
LST100-80	1" x 1"	Strainer - 80 Mesh S.S. Screen	1	24.76
LST100-100	1" x 1"	Strainer - 100 Mesh S.S. Screen	1	24.76

1 1/4" AND 1 1/2" POLY "T" STRAINERS

PART NO.	SIZE	DESCRIPTION	QTY	PRICE EA.
LST125-80	1 1/4" x 1 1/4"	Strainer - 80 Mesh S.S. Screen	1	49.33
LST125-100	1 1/4" x 1 1/4"	Strainer - 100 Mesh S.S. Screen	1	49.33
LST150-80	1 1/2" x 1 1/2"	Strainer - 80 Mesh S.S. Screen	1	49.33
LST150-100	1 1/2" x 1 1/2"	Strainer - 100 Mesh S.S. Screen	1	49.33